

Driver Details

NAME Atsushi Yamaguchi
 DATE 2019 / 11 / 3
 EVENT / TRACK TM circuit
 WEATHER cloudy
 RESULT
 FASTEST LAP TIME

Chassis and Electrics

CHASSIS Mid Alloy Carbon
 TOP DECK Vertical Horizontal
 BODY SHELL 200 DOGSBOLLOX
 WING RC-MISSION Type-2RH 0.5mm
 E.S.C Hobbywing
 SERVO Sanwa
 RECEIVER Sanwa
 LIPO

Track Conditions

GRIP LEVEL High Medium Low
 TYPE Tight Open Mixed
 SURFACE Carpet Tarmac
 CONDITION Smooth Bumpy
 TEMPERATURE Air °C °F Track °C °F
 VENUE Indoor Outdoor

Motor and Gearing

MOTOR REDS Racing 17.5T JMRC
 ROTOR DIAMETER 12.5mm
 TIMING 36°
 GEAR PITCH 48DP 64DP
 SPUR SIZE 114 T
 PINION SIZE 35 T


Notes

Mi7

Wheels, Tyres and Inserts

WHEELS
 TYRES
 INSERTS
 TYRE ADDITIVE

ADDITIVE TIME	Front	Minutes	Rear	Minutes
TYRE WARMERS	Yes <input type="checkbox"/>	No <input type="checkbox"/>	Temp °C	Time

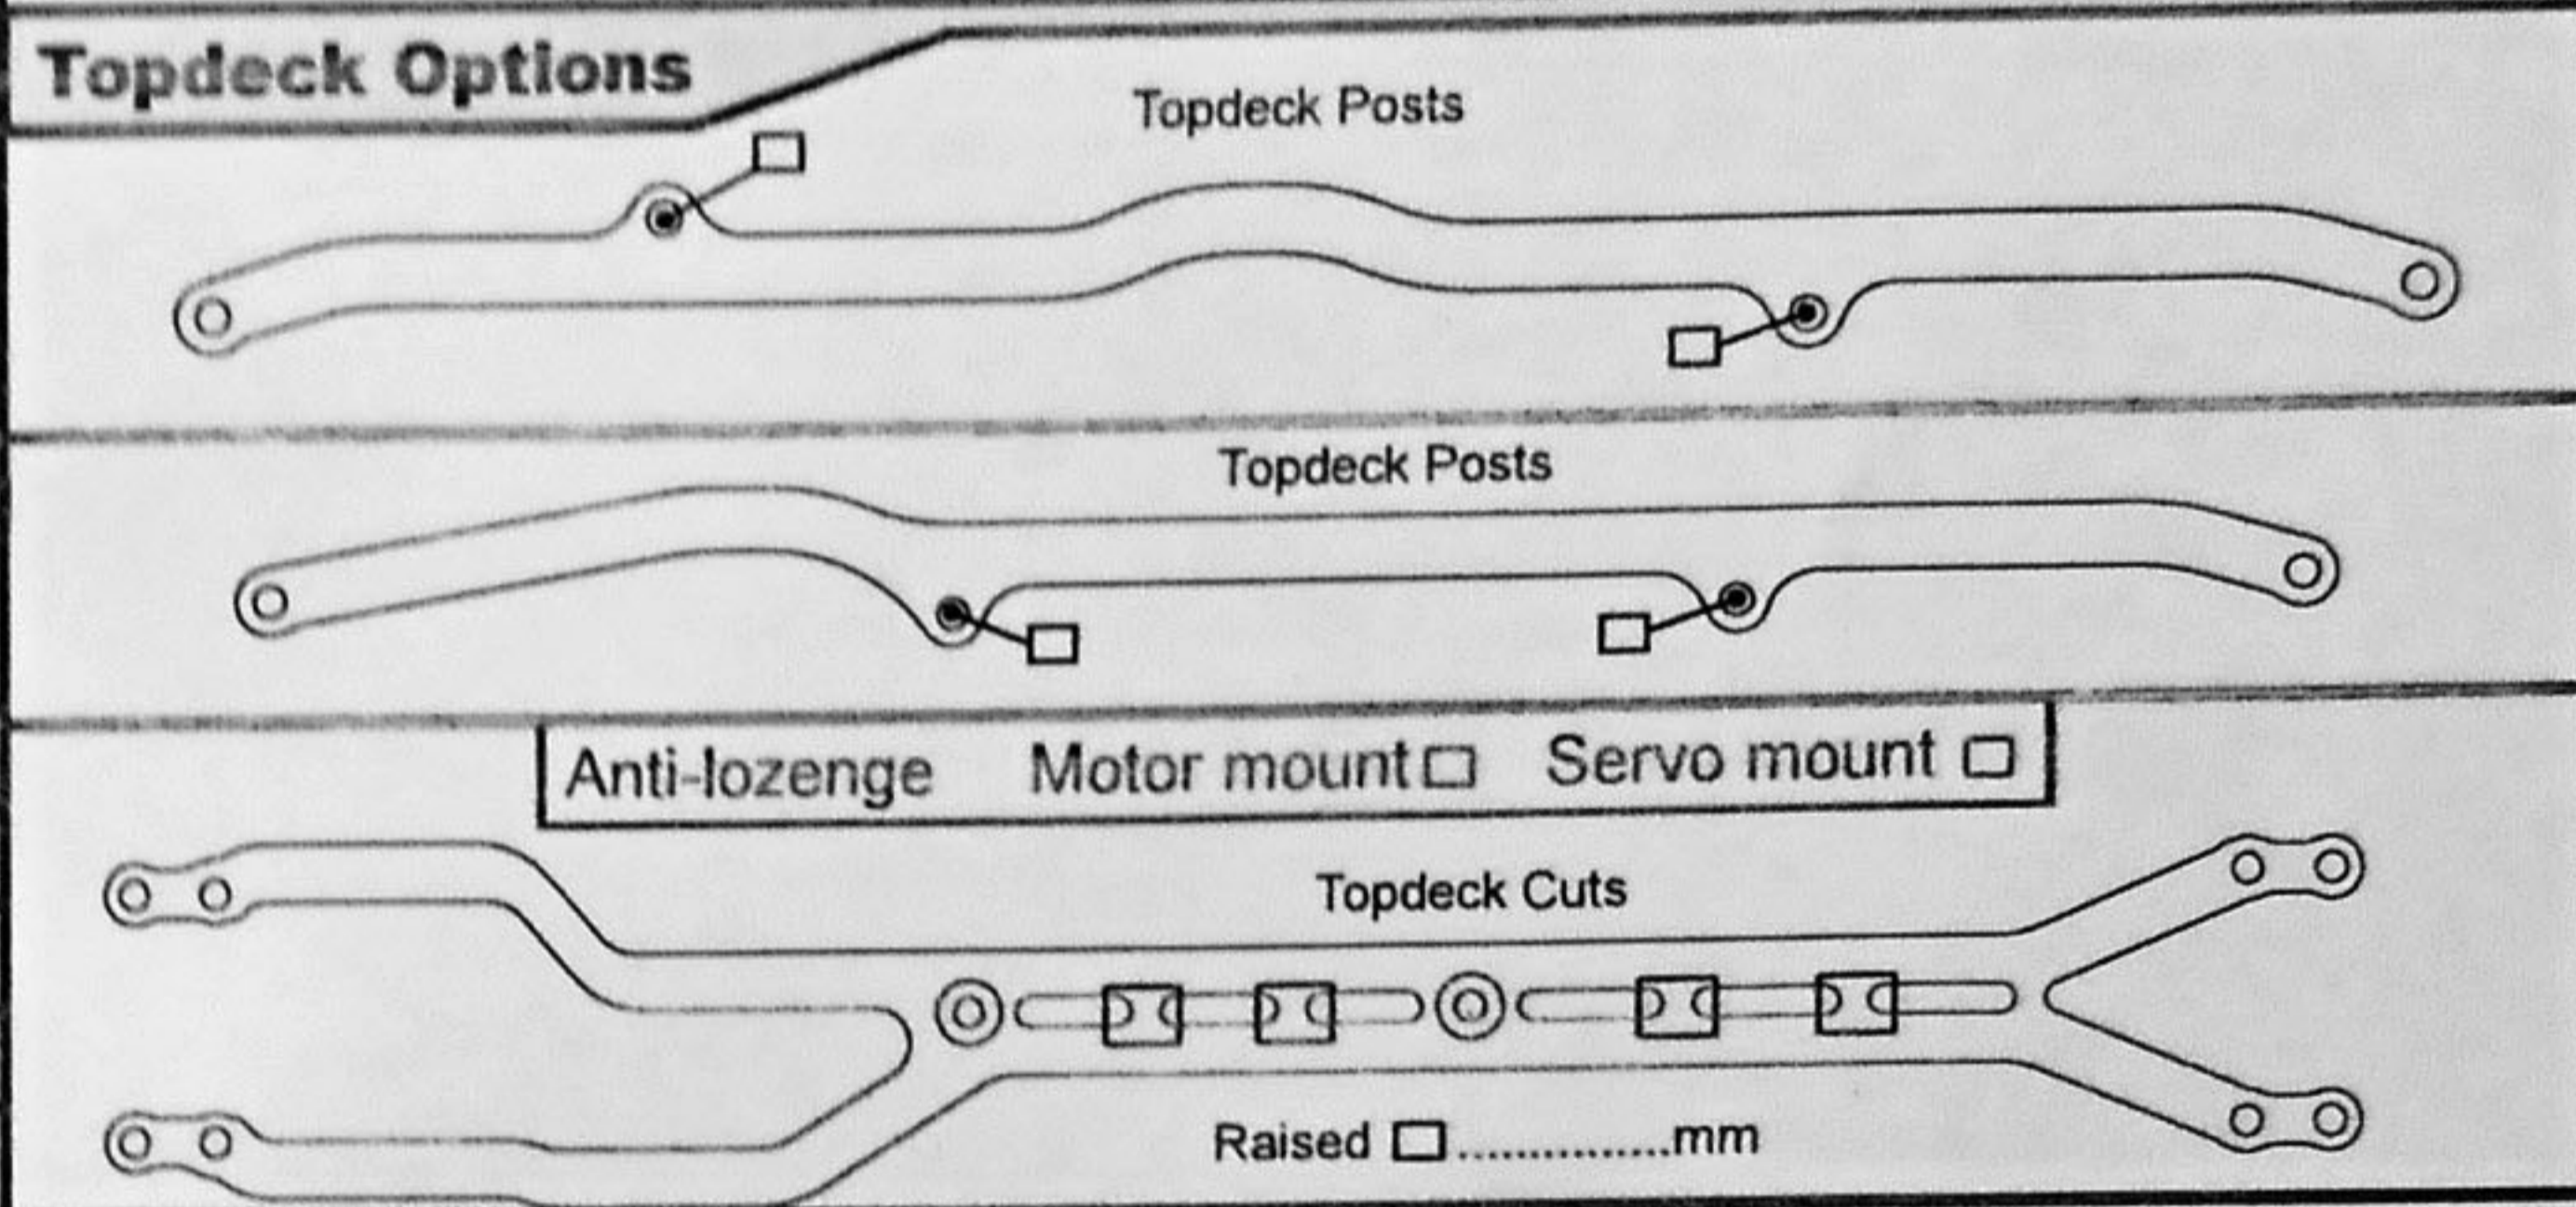

Front

Washers 0 mm

Spool
 Gear Diff
 Diff Oil cTs

SERVO SAVER
 Yes
 No

Washers 1.0 mm

Strap Split Block

Washers 2 mm

Washers 1.0 mm

Washers 1.0 mm

No Dot - 1.0mm
 1 Dot - 1.1mm
 2 Dot - 1.2mm - Kit
 3 Dot - 1.3mm

53.0mm
 53.5mm
 54.5mm - Kit

0 Dot - Kit 2 Dot
 1 Dot Front Hole 3 Dot Front Hole
 1 Dot Rear Hole 3 Dot Rear Hole

Front of car
 Rear hole Front hole

Peripheral Damping
 Yes
 No

Cap Type Vented Sealed Emulsion
 Oil... AXON 35 cTs
 Spring... AXON SLS 2.6 Blue
 Piston... 1.1 x 4
 Drilled Yes No
 Drilled piston Hole Size mm
 Shock Length (X) 10.5 mm
 Rebound 0 %

Washers 0.5 mm

Drop 5 mm (on 1.6mm droop gauge spacer)

Ride Height 5.1 mm

Camber 2.0 °

Toe 0 °

Shims 1.0 mm

Pivot Pin Insert	Front	Rear
0.25 In	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
0.25 Out	<input type="checkbox"/>	<input type="checkbox"/>
0.75 In	<input type="checkbox"/>	<input type="checkbox"/>
0.75 Out	<input type="checkbox"/>	<input type="checkbox"/>

Rear

AXON
 Diff Oil 7000 cTs

Washers 0 mm

Washers 1.5 mm

Washers 0 mm

53.0mm - Kit
 53.5mm
 54.5mm

0 Dot - Kit 2 Dot
 1 Dot Front Hole 3 Dot Front Hole
 1 Dot Rear Hole 3 Dot Rear Hole

Front of car
 Front hole Rear hole

Peripheral Damping
 Yes
 No

Cap Type Vented Sealed Emulsion
 Oil... AXON 32.5 cTs
 Spring... AXON HPS 2.5-2.8 Red
 Piston... 1.1 x 4
 Drilled Yes No
 Drilled piston Hole Size mm
 Shock Length (X) 10.5 mm
 Rebound 0 %

Drop 4 mm (on 1.6mm droop gauge spacer)

Ride Height 5.2 mm

Camber 2.0 °

Toe 2.0 °

Shims 1.0 mm

Pivot Pin Insert	Front	Rear
0.25 In	<input type="checkbox"/>	<input type="checkbox"/>
0.25 Out	<input type="checkbox"/>	<input type="checkbox"/>
0.75 In	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
0.75 Out	<input type="checkbox"/>	<input type="checkbox"/>