

Driver Details

NAME Yamauchi Atsushi
 DATE 2020.06.27
 EVENT / TRACK TMサーキット
 WEATHER -
 RESULT -
 FASTEST LAP TIME 14.705

Chassis and Electrics

CHASSIS Mid Alloy Carbon
 TOP DECK Vertical Horizontal
 BODYSHELL Twister(スーパーライト)
 WING Twister
 E.S.C HobbvWina Xerun XR10PRO
 SERVO SANWA
 RECEIVER SANWA
 LIPO ARROWMAX 5500(Ultra Low Profile)

Track Conditions

GRIP LEVEL High Medium Low
 TYPE Tight Open Mixed
 SURFACE Carpet Tarmac
 CONDITION Smooth Bumpy
 AIR TEMPERATURE °C °F TRACK TEMPERATURE °C °F
 VENUE Indoor Outdoor

Motor and Gearing

MOTOR HobbvWina Xerun V10 G3 17.5T
 ROTOR DIAMETER 12.3
 TIMING 41
 GEAR PITCH 48DP 64DP
 SPUR SIZE 112
 PINION SIZE 38

NOTES


- ・ アッパーデッキ (ビス4本止め)
- ・ スタビライザーは130°に広げて使用
- ・ LCGバッテリー使用のため、バッテリー下に重り30g (SMJを使用)
- ・ シャーシ裏のビスはチタンを使用 (バルク下のネジのみ真鍮ネジを使用)
- ・ ARSのバルク側の設置部分に3mmのシム
- ・ ボディの前出し量 3mm
- ・ ギアデフオイル量 1.8g
- ・ ダンパーオリングはXray オリングを使用



Wheels, Tyres and Inserts

WHEELS RUSH
 TYRES RUSH
 INSERTS RUSH
 TYRE ADDITIVE
 ADDITIVE TIME Front Minutes Rear Minutes
 TYRE WARMERS Yes No Temp °C Time Minutes

Topdeck Options

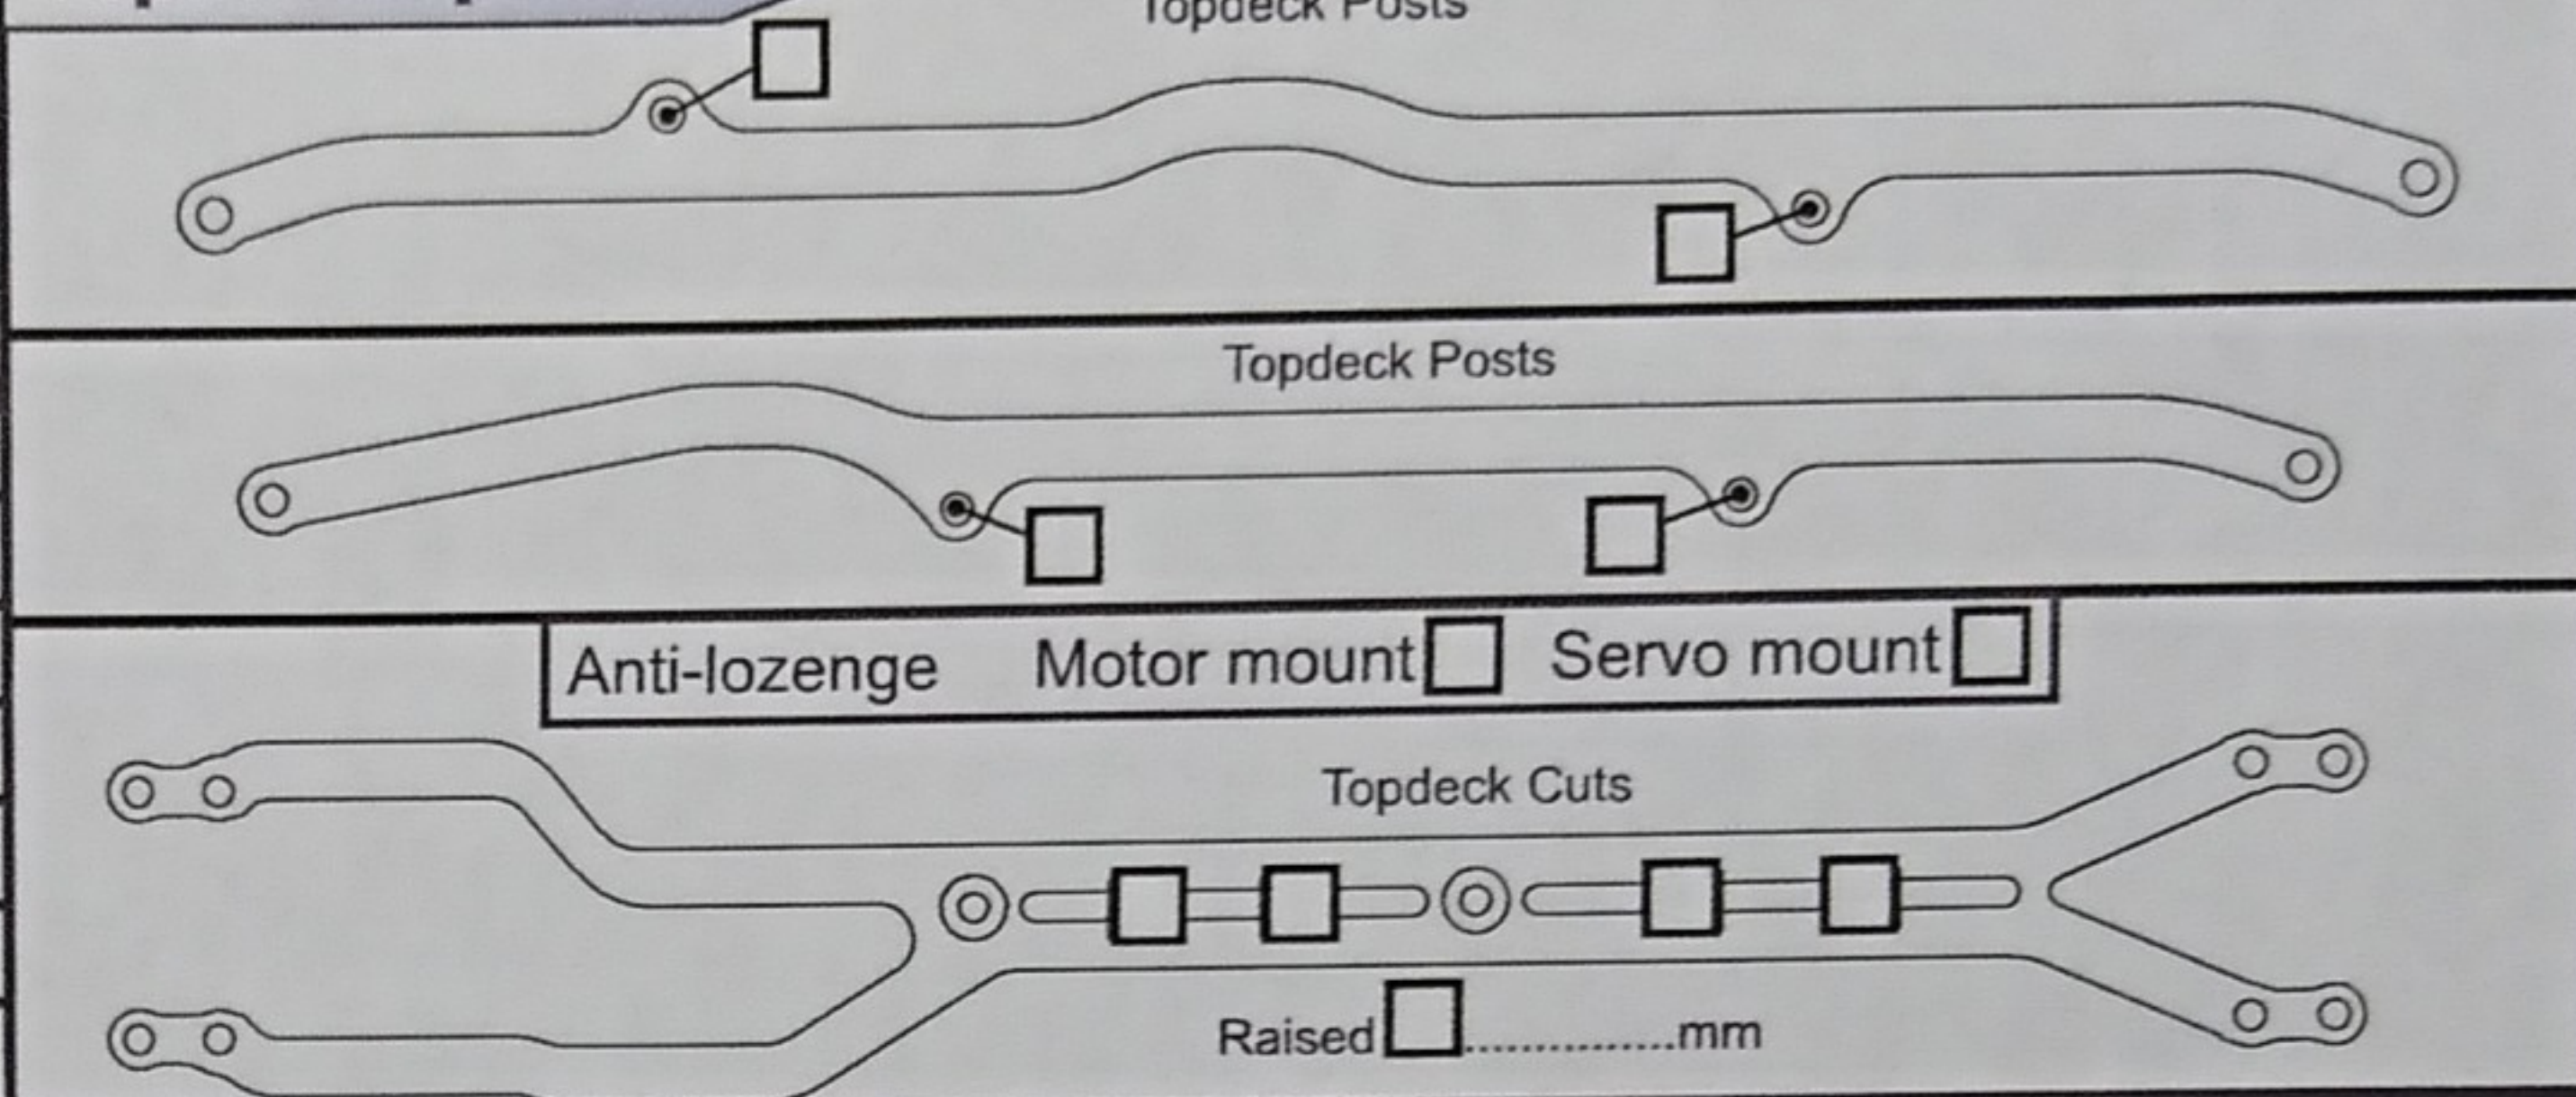

Front

Washers 0.5 mm

Washers 1.5 mm

Washers 2.5 mm

Washers 1.2 mm

53.0mm
53.5mm
54.5mm - Kit

0 Dot - Kit
1 Dot Front Hole
1 Dot Rear Hole

2 Dot
3 Dot Front Hole
3 Dot Rear Hole

Spool
Gear Diff
Diff Oil cTs

SERVO SAVER Yes No

Strap Split Block

Washers 1.2 mm

Inside Wheel Lock °
Outside Wheel Lock °

Peripheral Damping Yes No

Cap Type Vented Sealed Emulsion
Oil 27.5 cTs

Spring AXON.HPS.2.65.....

Piston 1.1x4.....

Drilled Yes No

Drilled piston Hole Size 1.1 mm

Shock Length (X) 10.5 mm

Rebound 0 %

Washers 1 mm

Drop 5.8 mm (on 1.6mm droop gauge spacer)

Ride Height 5.0 mm

Camber 1.5 °

Toe 0.5 °

Shims 0.1 mm

Shims 0.5 mm

Pivot Pin Insert	
0.25 In	Front <input type="checkbox"/> Rear <input type="checkbox"/>
0.25 Out	Front <input type="checkbox"/> Rear <input type="checkbox"/>
0.75 In	Front <input type="checkbox"/> Rear <input type="checkbox"/>
0.75 Out	Front <input type="checkbox"/> Rear <input type="checkbox"/>

Narrow
Medium (kit)
Wide

Rear

Washers 0.5 mm

Washers 1.5 mm

Washers 1 mm

53.0mm - Kit
53.5mm
54.5mm

0 Dot - Kit
1 Dot Front Hole
1 Dot Rear Hole

2 Dot
3 Dot Front Hole
3 Dot Rear Hole

Diff Oil 5000 cTs

No Dot - 1.0mm
1 Dot - 1.1mm
2 Dot - 1.2mm - Kit
3 Dot - 1.3mm

Motor Screw Positions

Washers 1 mm

Peripheral Damping Yes No

Cap Type Vented Sealed Emulsion
Oil 27.5 cTs

Spring AXON.HLS.2.65.....

Piston 1.1x4.....

Drilled Yes No

Drilled piston Hole Size 1.1 mm

Shock Length (X) 10.5 mm

Rebound 0 %

Washers 1 mm

Drop 4.8 mm (on 1.6mm droop gauge spacer)

Ride Height 5.2 mm

Camber 1.5 °

Toe 2.0-2.3 °

Shims 0.5 mm

Shims 0.5 mm

Pivot Pin Insert	
0.25 In	Front <input type="checkbox"/> Rear <input type="checkbox"/>
0.25 Out	Front <input type="checkbox"/> Rear <input type="checkbox"/>
0.75 In	Front <input checked="" type="checkbox"/> Rear <input checked="" type="checkbox"/>
0.75 Out	Front <input type="checkbox"/> Rear <input type="checkbox"/>

Narrow
Medium (kit)
Wide