

Driver: Atsushi Yamaguchi Track: TMcircuit Event: _____
 Date: 2022/4/15 Qualifying: _____ Final: _____ Best Lap: 14.5

TRACK TYPE

Grip Level High Medium Low
 Type Tight Open Mixed
 Condition Flat Bumpy Mixed
 Surface Tarmac (Asphalt) Carpet
 Track Temp 18 °C
 Weather _____

Notes:

TYRES

Tyres _____
 Cleaner _____
 Additive _____
 Additive Time Front: _____ mins Rear: _____ mins
 Heating Time Front: _____ mins Rear: _____ mins
 Heating Temp Front: _____ °C Rear: _____ °C


Notes:

FRONT

KEY: CF = Carbon Fibre, AL = Aluminium, P = Plastic, F = Front, R = Rear
 H = High, L = Low, Y = Yes, N = No, V = Vertical, H = Horizontal

Ride Height 4.8 mm
 Camber -2.0 deg
 Droop 24.5 mm
 Castor 4 deg
 Toe -1.2 deg
 Anti Roll Bar 1.1 1.2 1.3 1.4
 Upper Link Mount 0 dot 1 dot
 Spool Height H L
 Diff Oil (if applicable) _____ cSt
 Servo Horn Height 18 mm Saver
 Steering Travel _____ in _____ out

Notes:

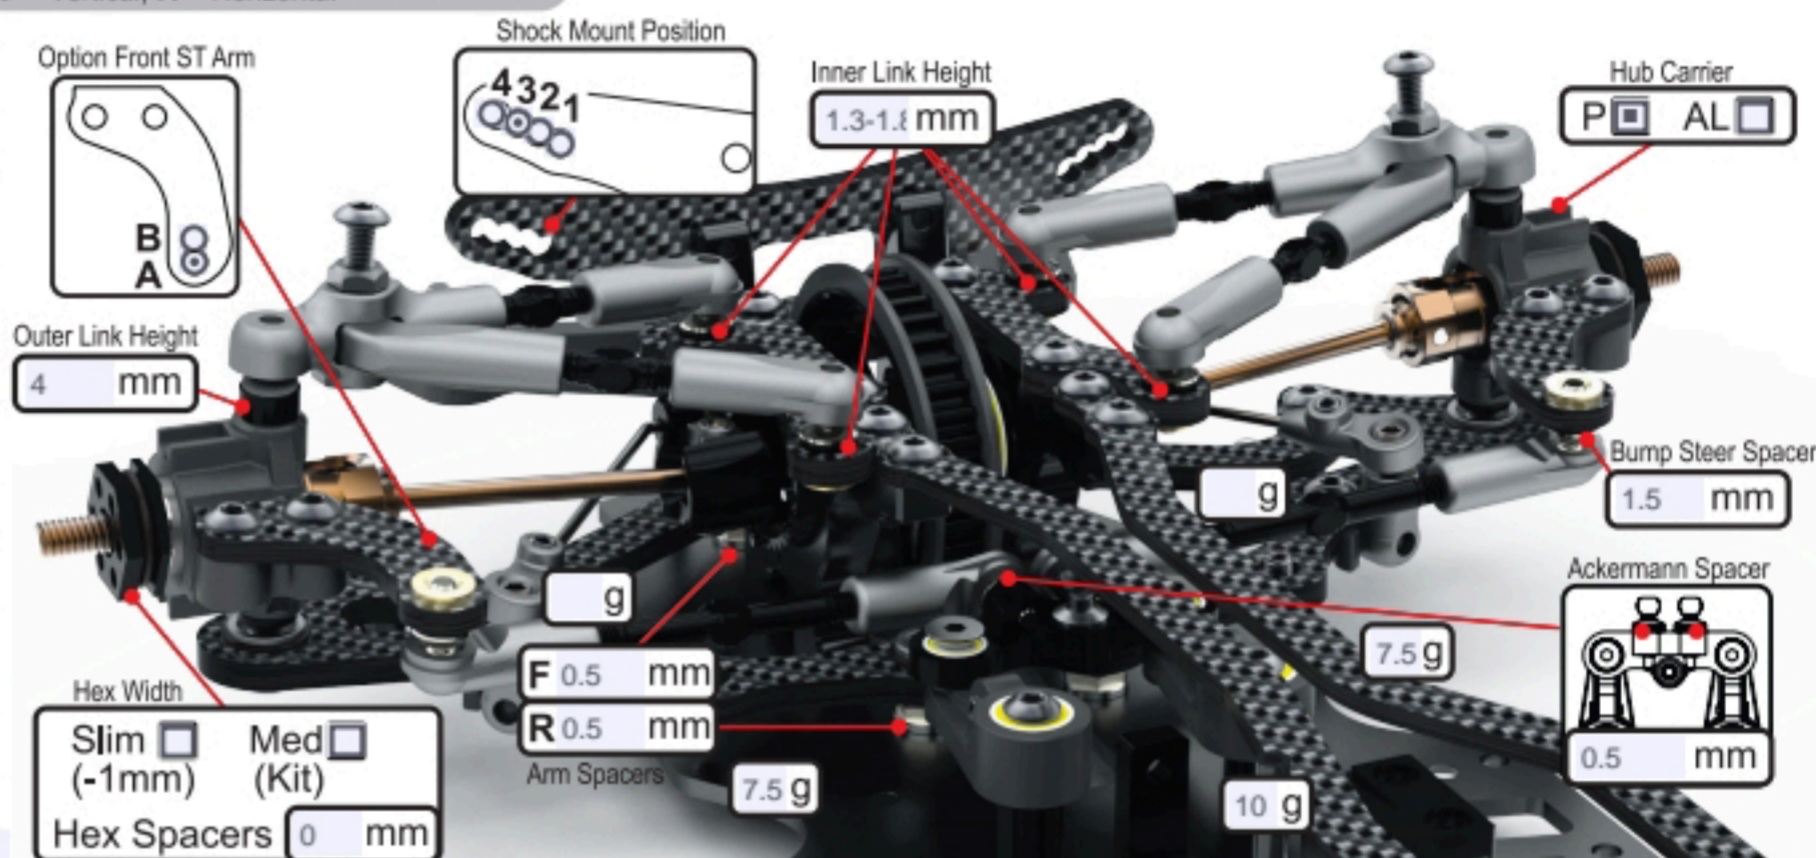


REAR

KEY: CF = Carbon Fibre, AL = Aluminium, P = Plastic, F = Front, R = Rear
 H = High, L = Low, Y = Yes, N = No, V = Vertical, H = Horizontal

Ride Height 5.0 mm
 Camber -2.0 deg
 Droop 24 mm
 Castor 3 deg
 Toe 1.7-2.0 deg
 Anti Roll Bar 1.1 1.2 1.3 1.4
 Upper Link Mount 0 dot 1 dot
 Diff Height H L
 Diff Oil 7000 cSt

Notes:

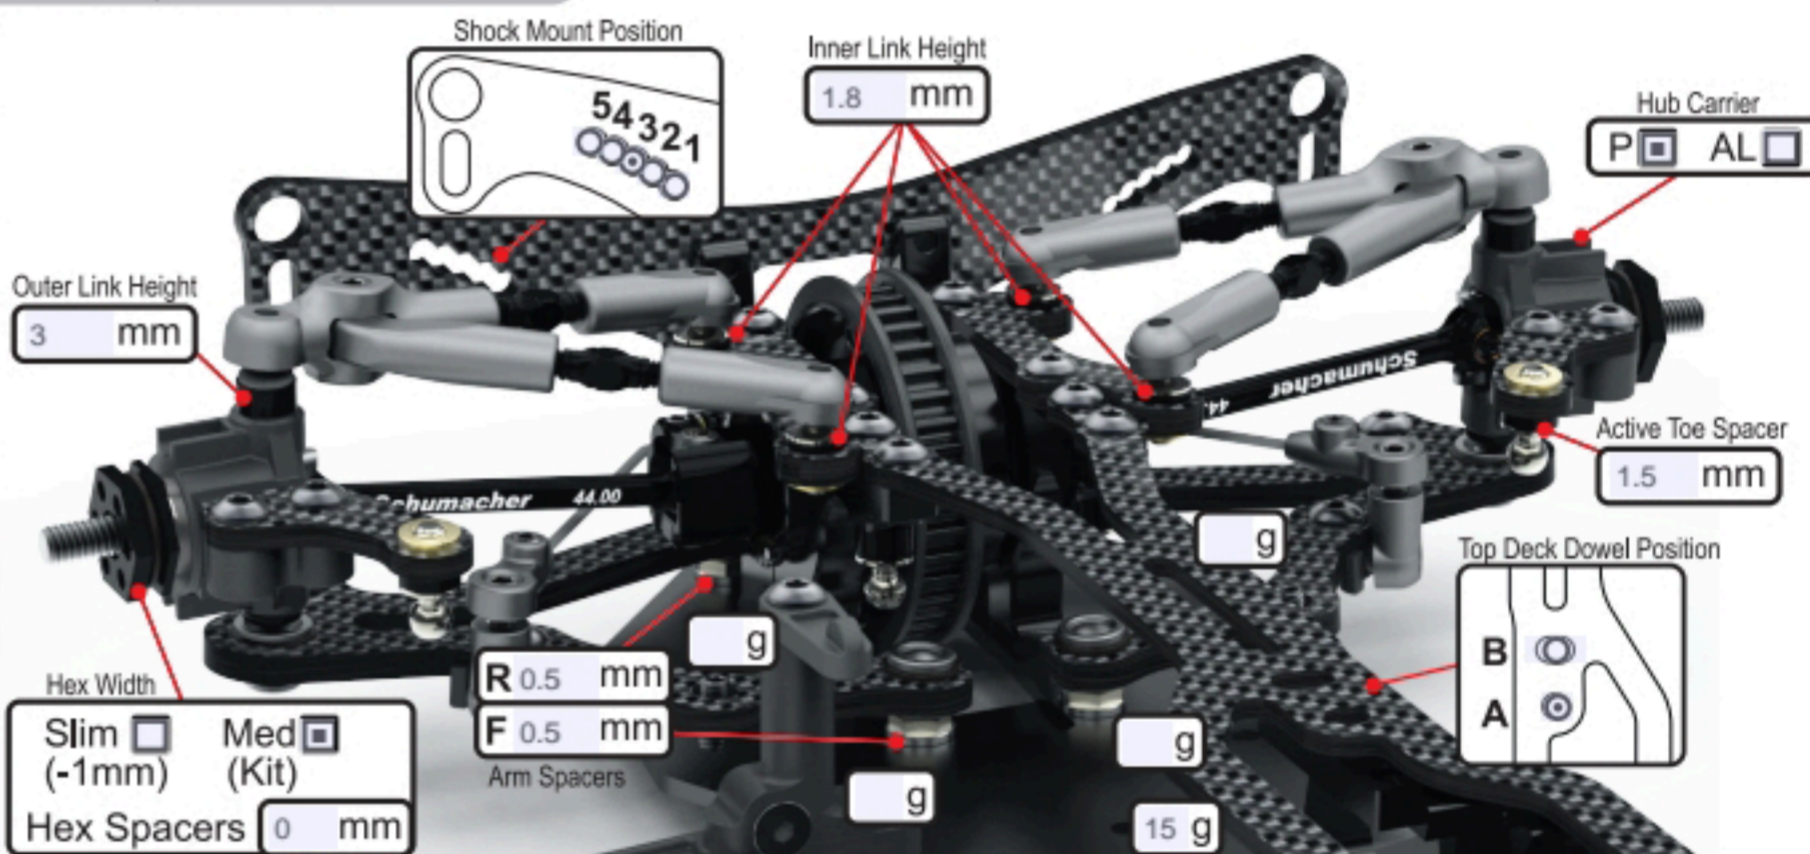

BODYSHELL

Body twister sp 0.5
 Wing twister sp 0.5
 Wing Height _____ mm
 Front Height _____ mm
 Body Stopper Y N
 Stopper Height _____ mm
 Body Weight _____ g
 Rear Posts V H
 Body Offset Fwrd 4 mm
 Wing Offset Rwrdr _____ mm

Notes:

CHASSIS

Chassis AL CF
 Top Deck 2mm Kit 1.6mm 2 piece
 T Brace Y N
 Motor Mount Screws 1 2 3 4
 Rear Front
 Total Weight 1310 g
 Mass Damper
 F _____ cSt
 R _____ cSt

Notes:

ELECTRONICS

E.S.C. hobby wing xerun xr10 pro
 Servo SANWA PGS-LH2
 RX SANWA RX-493
 LiPo _____
 Motor _____
 Rotor Dia. _____ mm
 Timing _____ deg
 Gear Pitch 48 64
 Pinion _____ t
 Spur _____ t
 Ratio 6.8

SHOCKS

KEY: x = Stroke, e = external
 V = Vented (Drilled), S = Sealed

	FRONT	REAR
Cap Type	<input checked="" type="checkbox"/> V <input type="checkbox"/> S <input type="checkbox"/>	<input type="checkbox"/> V <input type="checkbox"/> S <input type="checkbox"/>
Body	<input checked="" type="checkbox"/> Kit <input type="checkbox"/> Kashima Coated <input type="checkbox"/>	
Oil	<u>32.5</u> cSt	<u>32.5</u> cSt
Piston	<input type="checkbox"/> kit 4hole 1.1mm	<input type="checkbox"/> kit 4hole 1.1mm
Spring	<u>AXON 2.65</u>	<u>AXON 2.65</u>
Length (x)	<u>9</u> mm	<u>9</u> mm
Rebound	<u>0</u> mm	<u>0</u> mm
Limiters (e)	<u>0</u> mm	<u>0</u> mm

Notes:

Driver: Atsushi Yamaguchi

Track: beetops

Event: Futaba cup

Date: 2022/5/22

Qualifying: 1

Final: 3

Be

TRACK TYPE

Grip Level High Medium Low

Type Tight Open Mixed

Condition Flat Bumpy Mixed

Surface Tarmac (Asphalt) Carpet

Track Temp 33 °C

Weather

Notes:

TYRES

Tyres Rush 40S

Cleaner

Additive Mighty GripperV3

Additive Time Front: 5 mins Rear: 5 mins

Heating Time Front: 5 mins Rear: 5 mins

Heating Temp Front: 55 °C Rear: 55 °C

Notes:

FRONT

KEY: CF = Carbon Fibre, AL = Aluminium, P = Plastic, F = Front, R = Rear
H = High, L = Low, Y = Yes, N = No, V = Vertical, H = Horizontal

Ride Height 5.0 mm

Camber -2.0 deg

Droop 24.5 mm

Castor 4 deg

Toe -1.0 deg

Anti Roll Bar 1.1 1.2 1.3 1.4

Upper Link Mount 0 dot 1 dot

Spool Height H L

Diff Oil (if applicable) cSt

Servo Horn Height 18 mm Saver

Steering Travel in out

Notes:


Option Front ST Arm



Outer Link Height

3 mm

Shock Mount Position



Inner Link Height

2.3 mm


Hex Width

Slim Med
(-1mm) (Kit)
Hex Spacers 0.5 mm

F 0.0 mm

R 0.0 mm

Arm Spacers 7.5 g

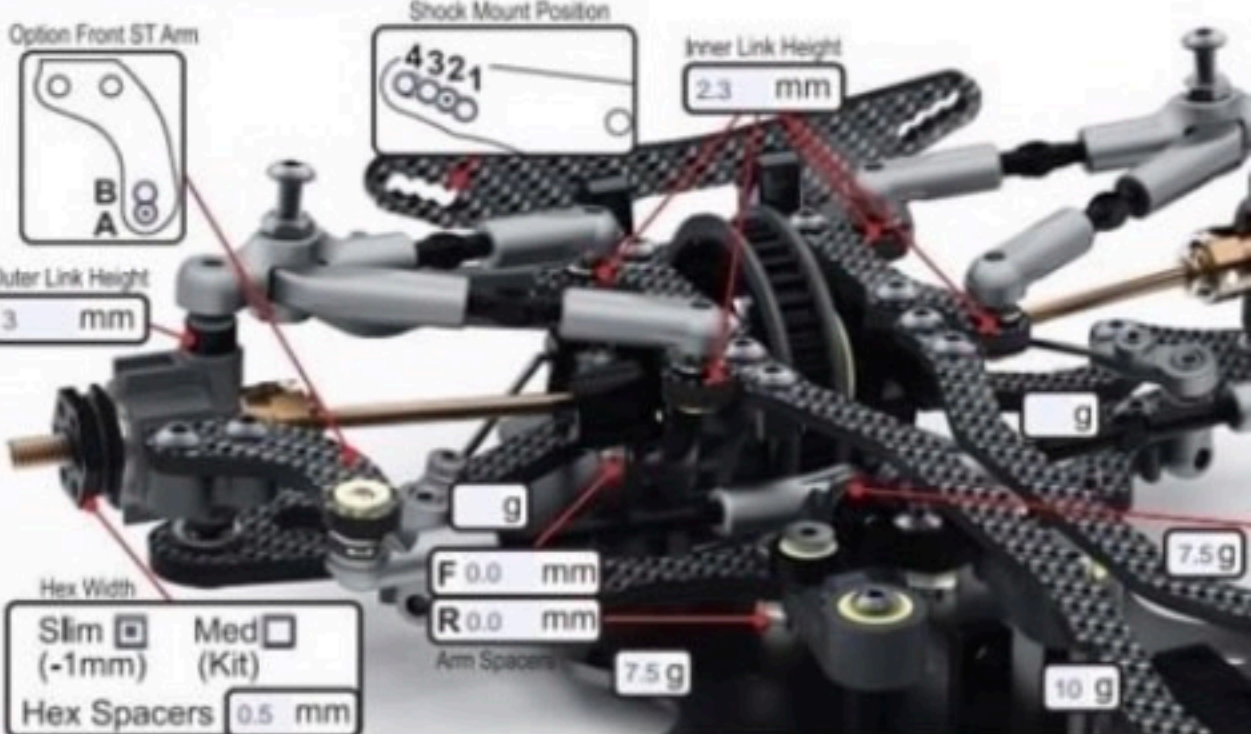

REAR

KEY: CF = Carbon Fibre, AL = Aluminium, P = Plastic, F = Front, R = Rear
H = High, L = Low, Y = Yes, N = No, V = Vertical, H = Horizontal

Ride Height 5.2 mm

Camber -2.0 deg

Droop 24 mm

Castor 1 deg

Toe 2.0 deg

Anti Roll Bar 1.1 1.2 1.3 1.4

Upper Link Mount 0 dot 1 dot

Diff Height H L

Diff Oil 7000 cSt

Notes:

Shock Mount Position



Inner Link Height

2.3 mm

Outer Link Height

2.8 mm


Hex Width

Slim Med
(-1mm) (Kit)
Hex Spacers 0.5 mm

R 0.0 mm

F 0.0 mm

Arm Spacers 15 g

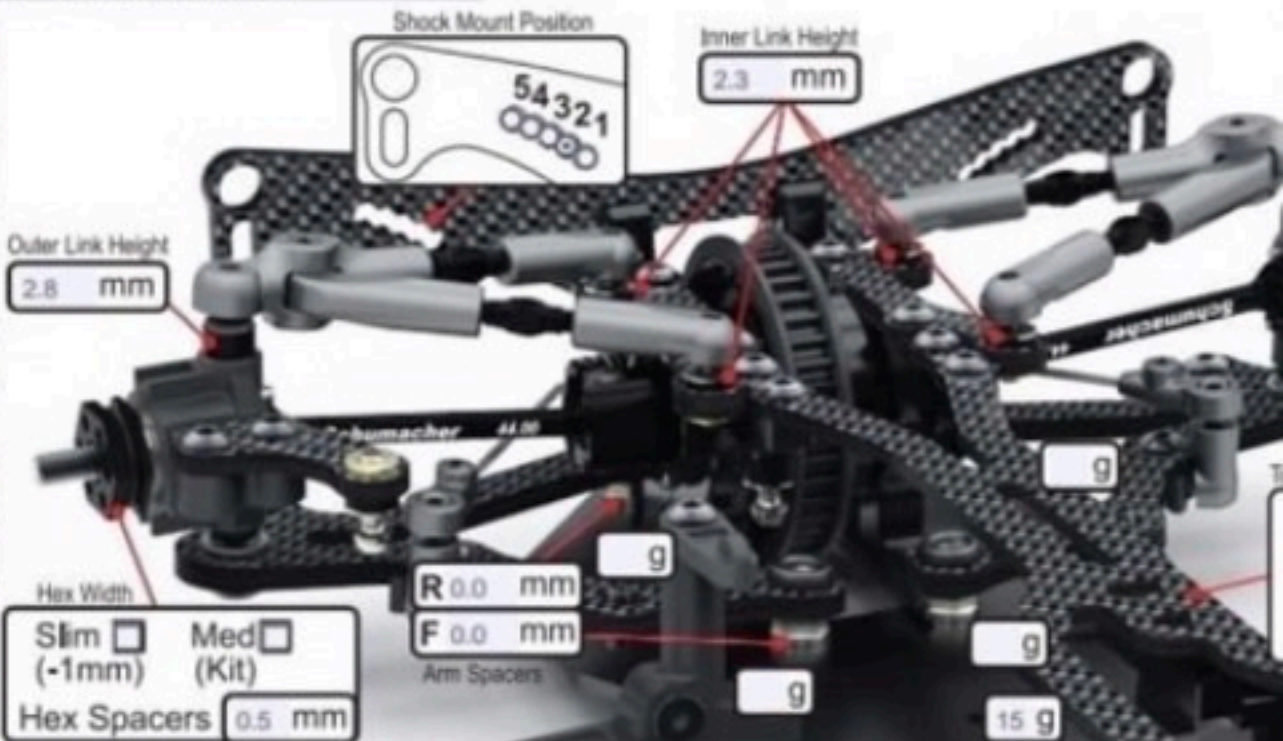

BODYSHELL

Body twister sp 0.5

Wing twister 0.5

Wing Height mm

Front Height mm

Body Stopper Y N

Stopper Height mm

Body Weight g

Rear Posts V H

Body Offset Fwd 4 mm

Wing Offset Rwd mm

Notes:

CHASSIS

Chassis AL CF

Top Deck 2mm Kit
1.6mm
2 piece

T Brace Y N

Motor Mount Screws
1 2 3 4
Rear Front

Total Weight 1310 g

Mass Damper
F cSt
R cSt

Notes:

ELECTRONICS

E.S.C. hobby wing xenon xr10 pro

Servo SANWA PGS-LH2

RX SANWA RX-493

LiPo GSTYLE superlog

Motor RedRacing prostock 17.5

Rotor Dia. 12.3 mm

Timing 45 deg

Gear Pitch 48 64

Pinion 31 t

Spur 114 t

Ratio 6.69

SHOCKS

KEY: x =
V = Vente

FRONT

Cap Type V S

Body Kit Kar

Oil 35 cSt

Piston kit 4hole 1.1mm

Spring AXON 2.65 SLS

Length (x) 9 mm

Rebound 0 mm

Limiters (e) 0 mm

Notes: