

Driver: ATSUSHI YAMAGUCHI Track: TMcircuit Event: SPEED KING TOUR
 Date: 2023/6/4 Qualifying: 1 Final: 1 Best Lap: 13.7

TRACK TYPE

Grip Level High Medium Low
 Type Tight Open Mixed
 Condition Flat Bumpy Mixed
 Surface Tarmac (Asphalt) Carpet
 Track Temp 28 °C
 Weather

Notes:

TYRES

Tyres RUSH28X
 Cleaner
 Additive
 Additive Time Front: mins Rear: mins
 Heating Time Front: mins Rear: mins
 Heating Temp Front: °C Rear: °C

Notes:


- ・ナックル下のシムを0.3mmに変更し、ナックル位置を下げて使用。
- ・VI-FA製バンパーを使用

FRONT

KEY: CF = Carbon Fibre, AL = Aluminium, P = Plastic, F = Front, R = Rear
 H = High, L = Low, Y = Yes, N = No, V = Vertical, H = Horizontal

Ride Height 5.0 mm
 Camber 2.0 deg
 Droop 5.8 mm
 Castor 2 deg
 Toe 1 deg
 Anti Roll Bar 1.1 1.2 1.3 1.4
 Upper Link Mount 0 dot 1 dot
 Spool Height H L
 Diff Oil (if applicable) cSt
 Servo Horn Height 18.5mm Saver
 Steering Travel in 26 out

Notes:

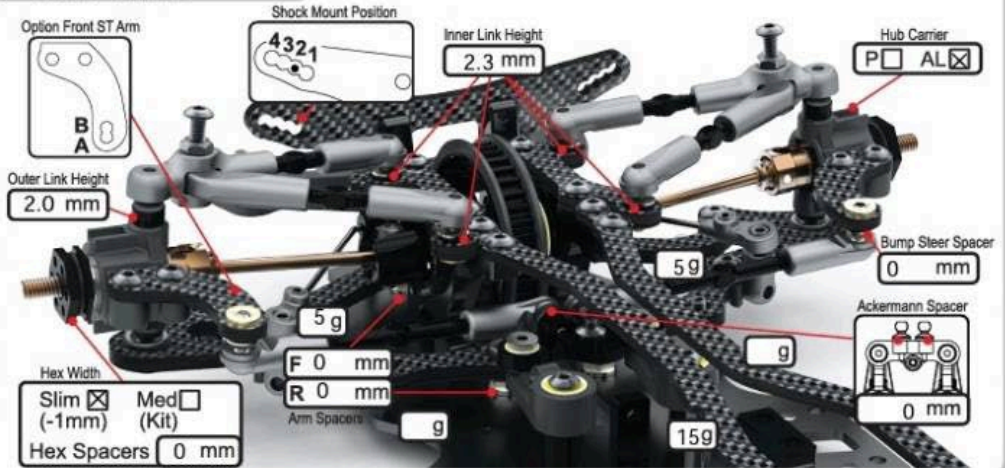


REAR

KEY: CF = Carbon Fibre, AL = Aluminium, P = Plastic, F = Front, R = Rear
 H = High, L = Low, Y = Yes, N = No, V = Vertical, H = Horizontal

Ride Height 5.4 mm
 Camber 2 deg
 Droop 5.4 mm
 Castor 3 deg
 Toe 2.0 deg
 Anti Roll Bar 1.1 1.2 1.3 1.4
 Upper Link Mount 0 dot 1 dot
 Diff Height H L
 Diff Oil 7000 cSt

Notes:

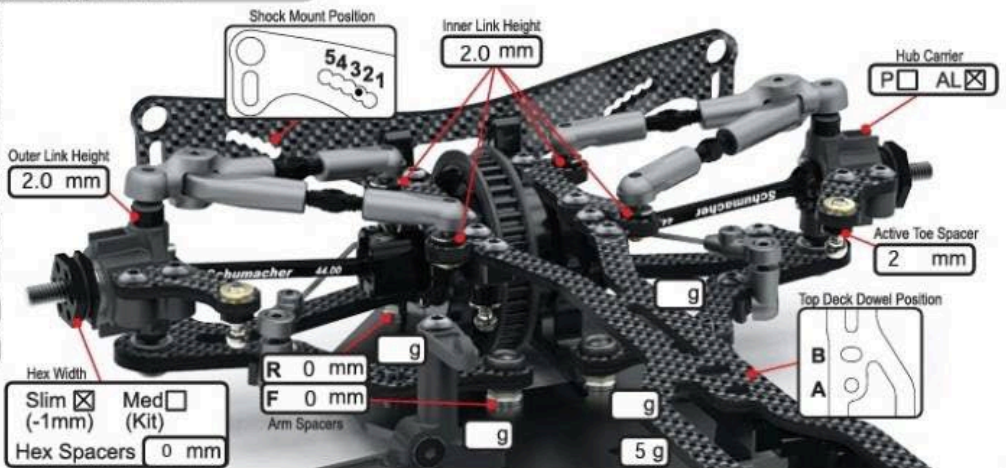

BODYSHELL

Body ツイスターSP UL
 Wing ツイスターSP UL
 Wing Height mm
 Front Height mm
 Body Stopper Y N
 Stopper Height mm
 Body Weight g
 Rear Posts V H
 Body Offset Fwrd 3 mm
 Wing Offset Rwrd mm

Notes:

CHASSIS

Chassis AL CF
 Top Deck 2mm Kit 1.6mm 2 piece
 T Brace Y N
 Motor Mount Screws 1 2 3 4
 Rear Front
 Total Weight 1320 g
 Mass Damper F R cSt cSt

Notes:

ELECTRONICS

E.S.C.
 Servo
 RX
 LiPo
 Motor REDS Racing VX3 17.5
 Rotor Dia. 12.5 mm
 Timing 36 deg
 Gear Pitch 48 64
 Pinion 35 t
 Spur 112 t
 Ratio

SHOCKS

KEY: x = Stroke, e = external
 V = Vented (Drilled), S = Sealed

	FRONT	REAR
Cap Type	<u>V</u> <input type="checkbox"/> <u>S</u> <input type="checkbox"/>	<u>V</u> <input type="checkbox"/> <u>S</u> <input type="checkbox"/>
Body	<u>Kit</u> <input type="checkbox"/> <u>Kashima Coated</u> <input checked="" type="checkbox"/>	
Oil	<u>AXON35</u> cSt	<u>AXON35</u> cSt
Piston	<u>4hole</u>	<u>4hole</u>
Spring	<u>AXON2.15</u>	<u>SMJ 2.65</u>
Length (x)	<u>9</u> mm	<u>9</u> mm
Rebound	<u> </u> mm	<u> </u> mm
Limiters (e)	<u> </u> mm	<u> </u> mm

Notes: