

Driver: Masaaki Honda Track: TMCircuit Event: Round 7
 Date: 2024/8/11 Qualifying: 2th Final: 1th Best Lap:

TRACK TYPE

Grip Level High Medium Low
 Type Tight Open Mixed
 Condition Flat Bumpy Mixed
 Surface Tarmac (Asphalt) Carpet
 Track Temp HOT °C
 Weather

Notes:

TYRES

Side Wall Glue Height Ø mm
 Tyres RUSH 32M VR2
 Cleaner RCM-DOM
 Additive YURUGIX Wet on track
 Additive Time Front: mins Rear: mins
 Heating Time Front: mins Rear: mins
 Heating Temp Front: °C Rear: °C

Notes:


U8901
 U8772
 U8768
 U7816
 U7837
 U8730
 U8323
 U8570
 U4968
 U7536
 U8256
 SPRING TITANIUM SCREW

FRONT

KEY: CF = Carbon Fibre, AL = Aluminium, P = Plastic
 F = Front, R = Rear

Ride Height 5.0 mm
 Camber 1.5 deg
 Droop 22.5 mm
 Castor 4.0 deg
 Toe out 0.5 deg
 Anti Roll Bar 1.1 1.2 1.3 1.4
 Upper Link Mount 0 Notch 1 Notch
 Spool Height U8777 +0.5mm Alloy Eccentric U8729 High Trans Housing
 Servo Horn Height 18 mm Saver
 Steering Travel 25 in out

Notes:

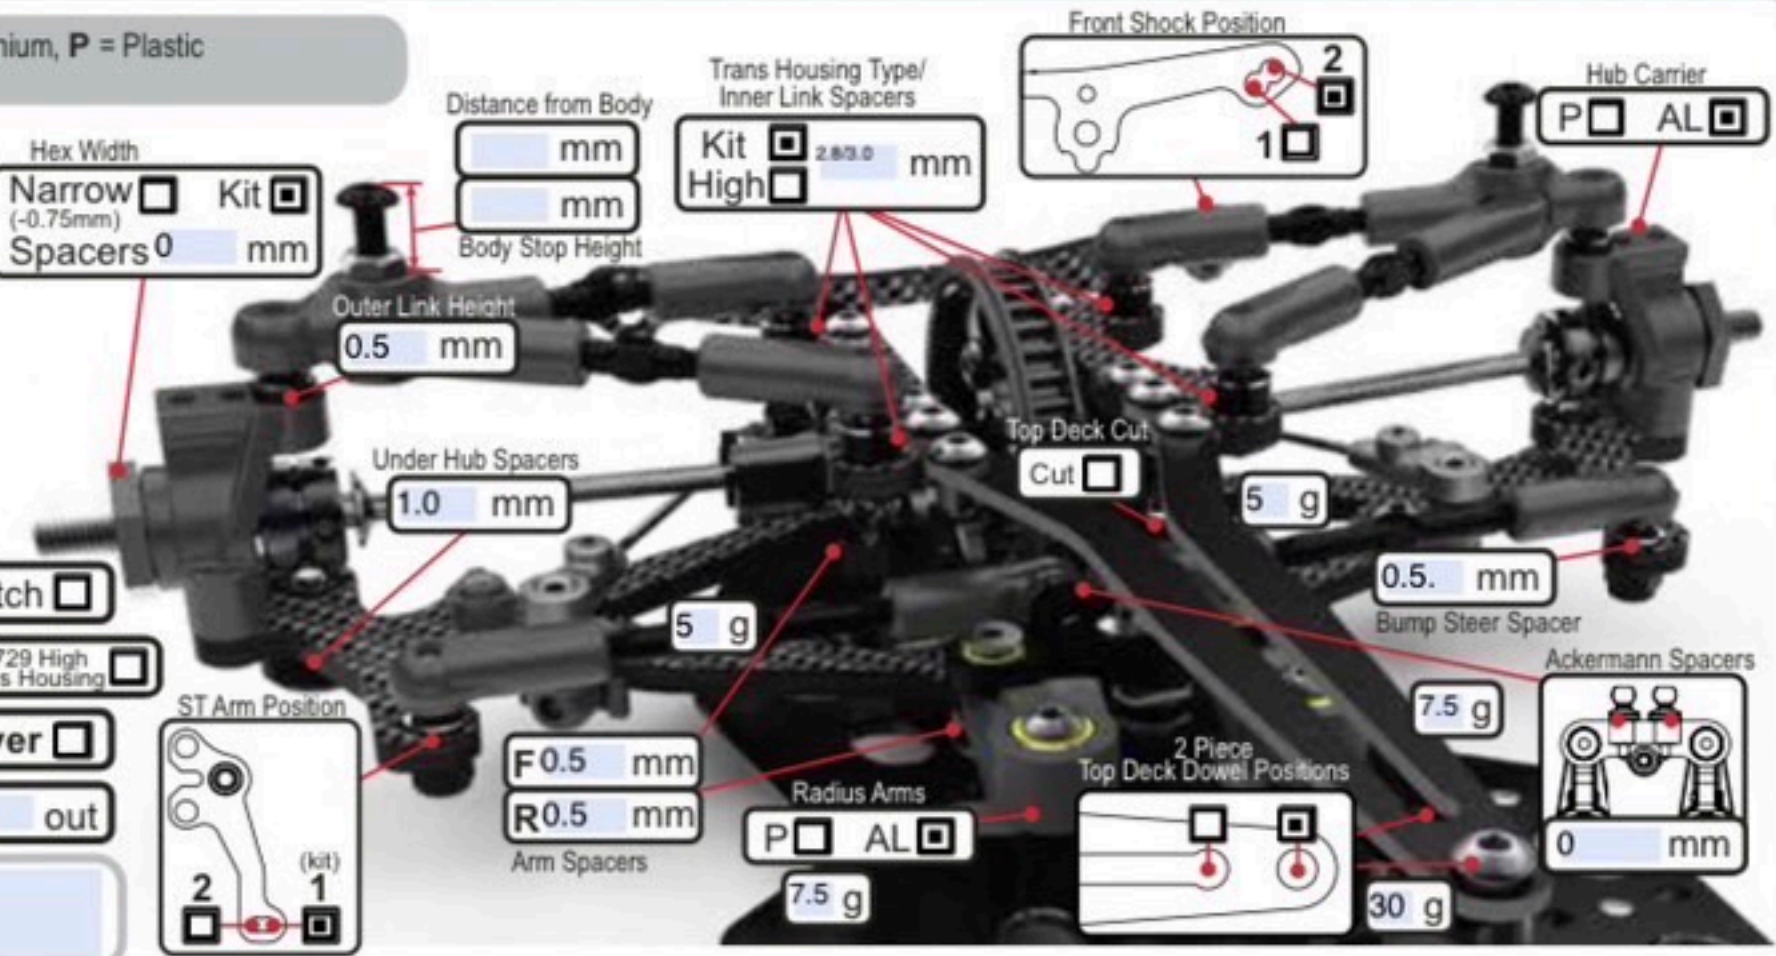


REAR

KEY: CF = Carbon Fibre, AL = Aluminium, P = Plastic
 F = Front, R = Rear

Ride Height 5.6 mm
 Camber 1.8 deg
 Droop 22 mm
 Castor -1.0 deg
 Toe 3.0 deg
 Anti Roll Bar 1.1 1.2 1.3 1.4
 Upper Link Mount 0 Notch 1 Notch
 Diff Height U8777 +0.5mm Alloy Eccentric U8729 High Trans Housing
 Diff Setting Diff Checker # 7500 / 1.3 cSt Warming

Notes:

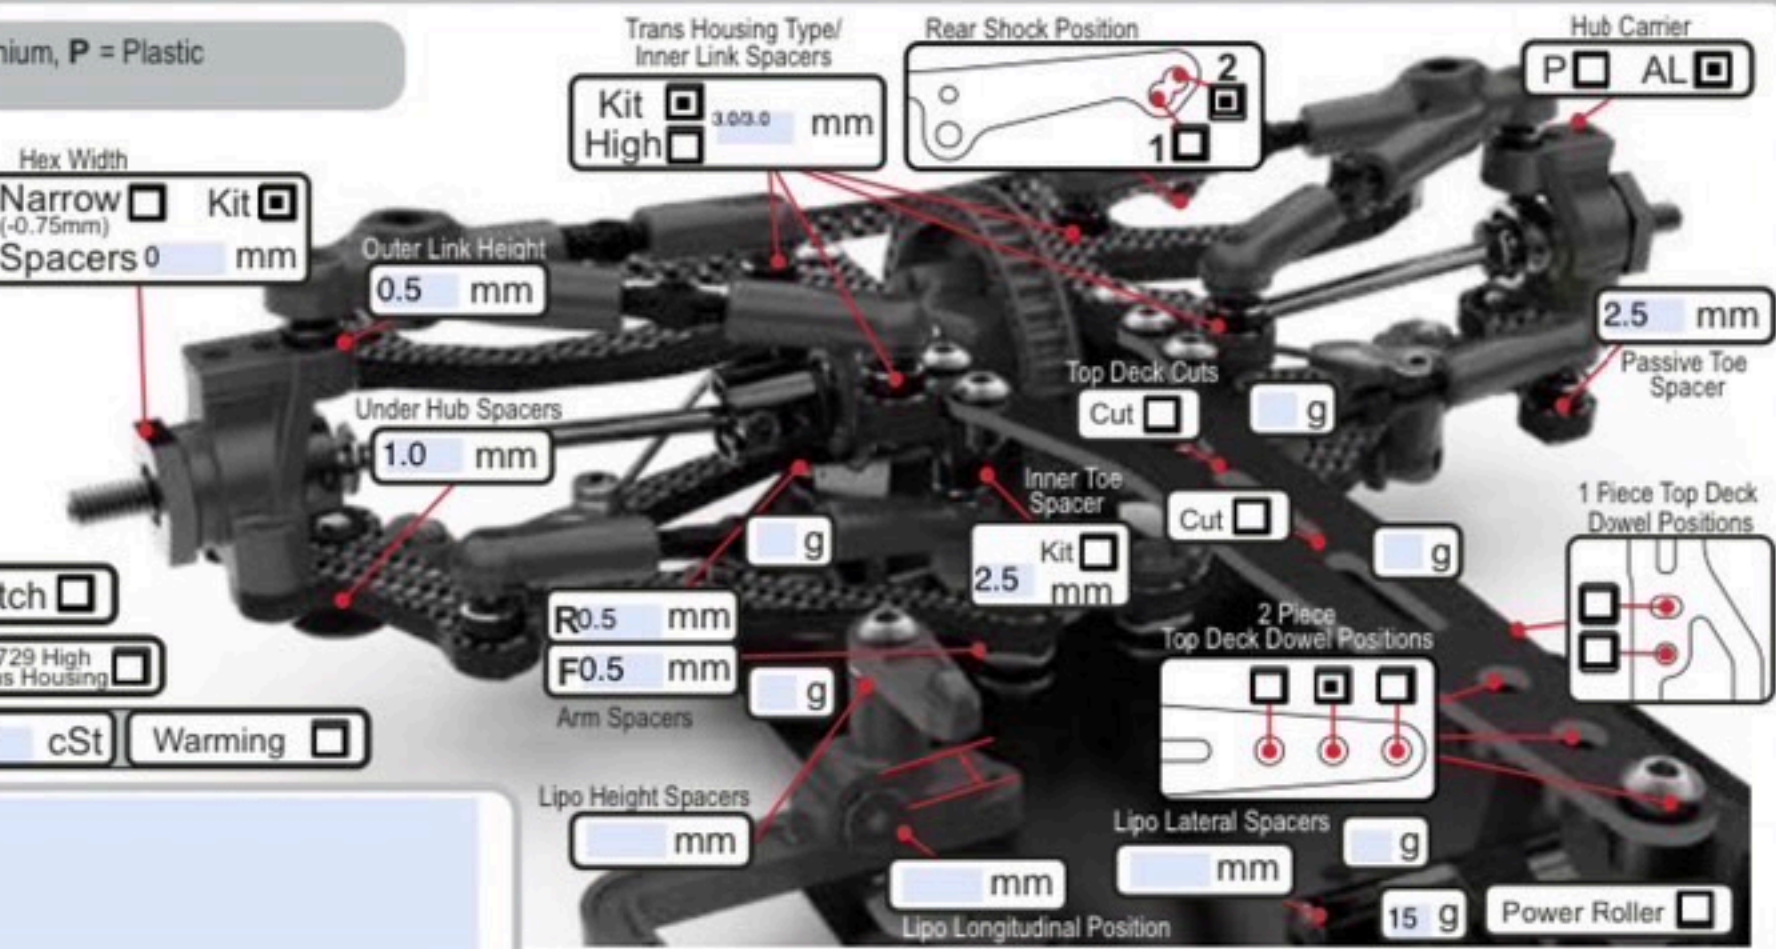

BODYSHELL

Body TWISTER 0.5
 Wing TWISTER 0.5
 Wing Height mm
 Splitter Height mm
 Body Weight g
 Body Offset Fwrd mm
 Wing Offset Rwrd mm
 Wing End Plates
 Front Post 1dot 2dot 3dot Pin Hole
 Rear Post 1dot 2dot 3dot Pin Hole
 Notes: SMJ1415

CHASSIS

Chassis AL CF
 Top Deck Options CF 1 Piece 2mm
 Front 2 Piece S2 1.6 C/F 1.6 C/F 2.0
 Rear 2 Piece S2 1.6 C/F 1.6 C/F 2.0
 T Brace PTFE Tape
 Motor Mount Screws R F
 Total Weight 1308 g
 Weight Distribution Front:50 :50 :Rear

ELECTRONICS

E.S.C. HW +10 g
 Servo SANWA LH2
 RX SANWA RX493 +15 g
 LiPo SUNPADOW 6500 +20 g
 Motor HW V10 G4R 17.5 Spacers mm
 Rotor Dia. 12.3 30820459 mm
 Timing 48 deg
 Gear Pitch 48 64
 Pinion 36 t
 Spur 111 t
 Ratio 5.6

SHOCKS

KEY: x = Stroke, e = external

| | FRONT | REAR |
|--------------|--|------------------------------------|
| Spring | AXON SS 2.65 | AXON SS 2.8 |
| Oil | CORE RC 400 cSt | CORE RC 400 cSt |
| Piston | Kit <input type="checkbox"/> 3/1.2 | Kit <input type="checkbox"/> 3/1.2 |
| Length (x) | 8 mm | 8 mm |
| Rebound | mm | mm |
| Limiters (e) | mm | mm |
| Body | Kit <input type="checkbox"/> Kashima Coated <input type="checkbox"/> | |

Notes: