

Driver: Masaaki Honda Track: Hong-uu Event: SPEED KING TOUR HONGUU
 Date: 2022/09/25 Qualifying: 1 Final: 1 Best Lap: -

TRACK TYPE

Grip Level High Medium Low
 Type Tight Open Mixed
 Condition Flat Bumpy Mixed
 Surface Tarmac (Asphalt) Carpet
 Track Temp 27 °C
 Weather

Notes:

TYRES

Tyres RUSH VR3 40X
 Cleaner -
 Additive Mighty Gripper V3 (yellow)
 Additive Time Front: 10 mins Rear: 10 mins
 Heating Time Front: 10 mins Rear: 10 mins
 Heating Temp Front: 70 °C Rear: 70 °C


Notes:

FRONT

KEY: CF = Carbon Fibre, AL = Aluminium, P = Plastic, F = Front, R = Rear
 H = High, L = Low, Y = Yes, N = No, V = Vertical, H = Horizontal

Ride Height 4.8 mm
 Camber 2.0 deg
 Droop 6.2 mm
 Castor 4.0 deg
 Toe -1.0 deg
 Anti Roll Bar 1.1 1.2 1.3 1.4
 Upper Link Mount 0 dot 1 dot
 Spool Height H L
 Diff Oil (if applicable) - cSt
 Servo Horn Height 18 mm Saver
 Steering Travel in out

Notes:

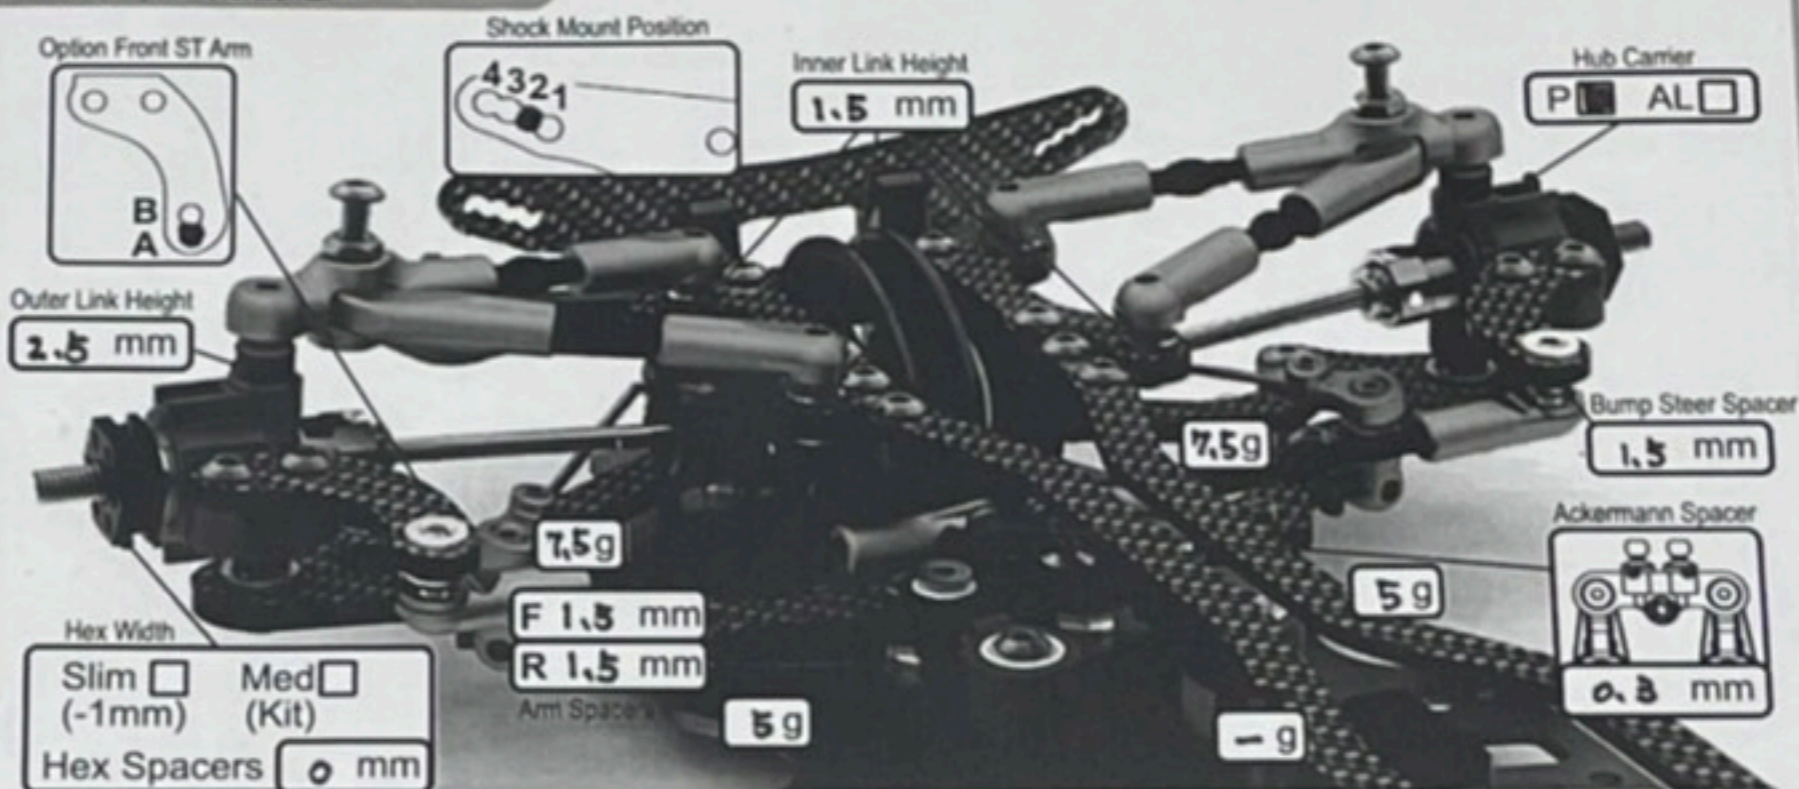


REAR

KEY: CF = Carbon Fibre, AL = Aluminium, P = Plastic, F = Front, R = Rear
 H = High, L = Low, Y = Yes, N = No, V = Vertical, H = Horizontal

Ride Height 5.2 mm
 Camber 2.0 deg
 Droop 5.4 mm
 Castor 4.0 deg
 Toe 2.0 deg
 Anti Roll Bar 1.1 1.2 1.3 1.4
 Upper Link Mount 0 dot 1 dot
 Diff Height H L
 Diff Oil 7500 / 1.6 cSt

Notes:

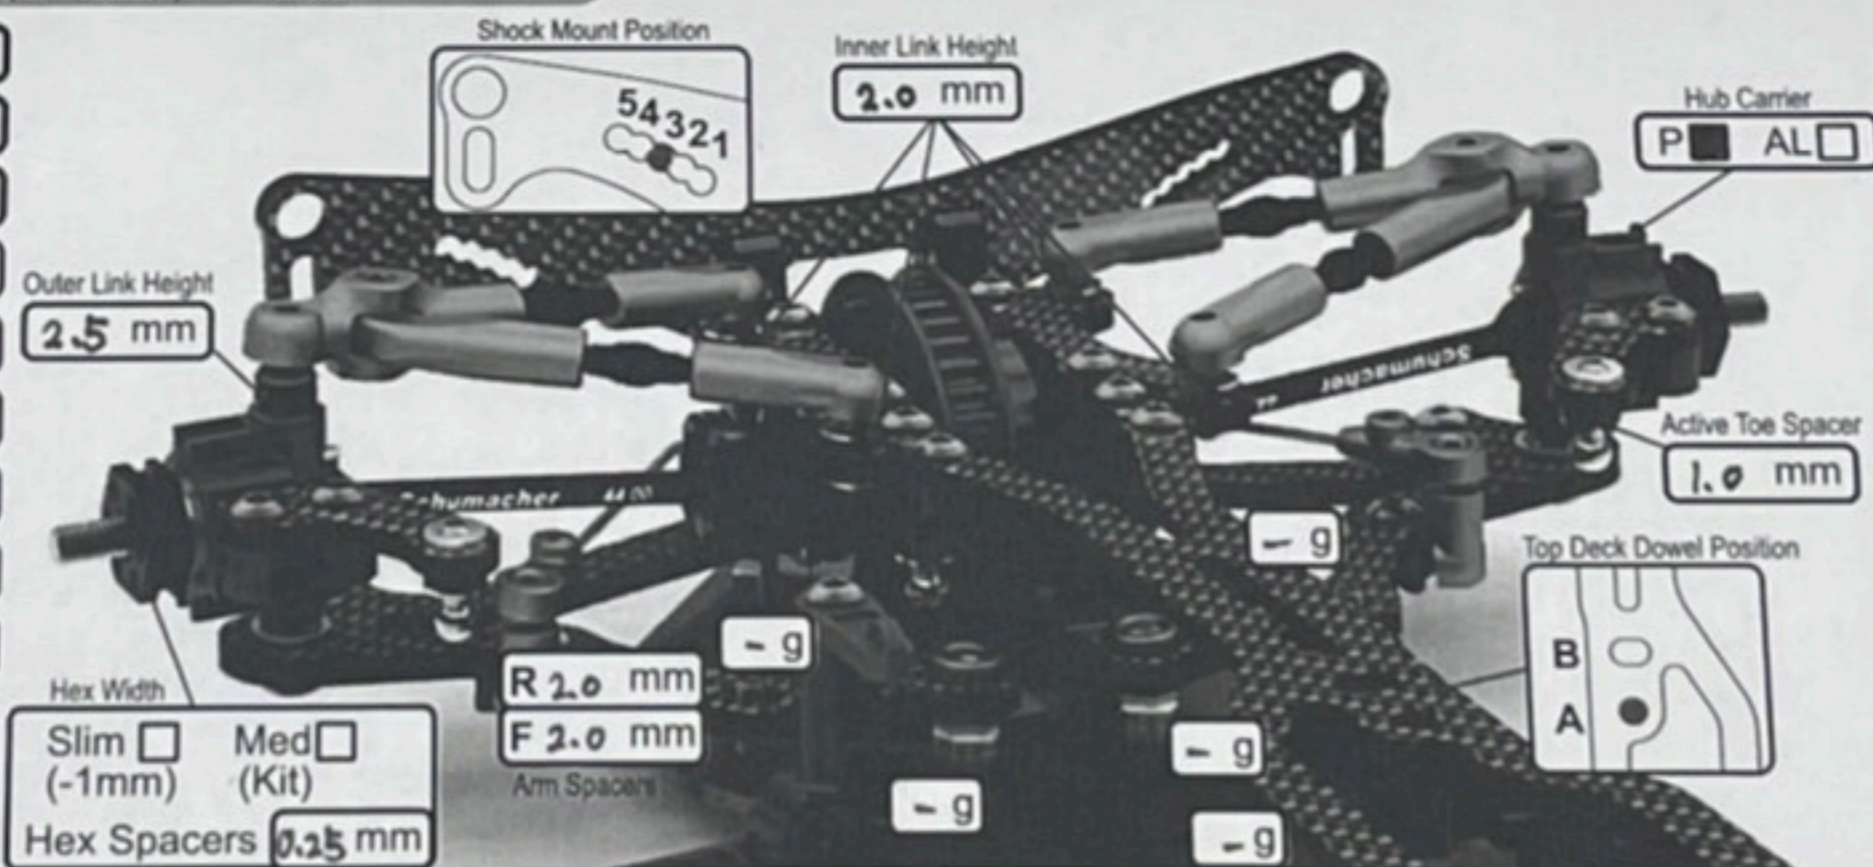

BODYSHELL

Body twister SP UL
 Wing twister SP UL
 Wing Height mm
 Front Height mm
 Body Stopper Y N
 Stopper Height mm
 Body Weight g
 Rear Posts V H
 Body Offset Fwd 4 mm
 Wing Offset Rwd mm

Notes:

CHASSIS

Chassis AL CF
 Top Deck 2mm Kit 1.6mm 2 piece
 T Brace Y N
 Motor Mount Screws
 1 2 3 4
 Rear Front
 Total Weight 1308 g
 Mass Damper
 F cSt
 R cSt

Notes:

ELECTRONICS

E.S.C. Hobby wing XR10 Pro
 Servo SANWA PGS-LH2
 RX SANWA RX-491
 LiPo SANPA DOW
 Motor Hobby wing G4 17.5
 Rotor Dia. 12.3 mm
 Timing 41 deg
 Gear Pitch 48 64
 Pinion 39 t
 Spur 112 t
 Ratio 5.358

SHOCKS

KEY: x = Stroke, e = external
 V = Vented (Drilled), S = Sealed

	FRONT	REAR
Cap Type	<input checked="" type="checkbox"/> V <input type="checkbox"/> S <input type="checkbox"/>	<input checked="" type="checkbox"/> V <input type="checkbox"/> S <input type="checkbox"/>
Body	<input checked="" type="checkbox"/> Kit <input type="checkbox"/> Kashima Coated <input type="checkbox"/>	
Oil	<u>30</u> cSt	<u>30</u> cSt
Piston	<u>4hole</u>	<u>4hole</u>
Spring	<u>AXON 2.65</u>	<u>AXON 2.65</u>
Length (x)	<u>8.5</u> mm	<u>8.8</u> mm
Rebound	<u>-</u> mm	<u>-</u> mm
Limiters (e)	<u>-</u> mm	<u>-</u> mm

Notes: